

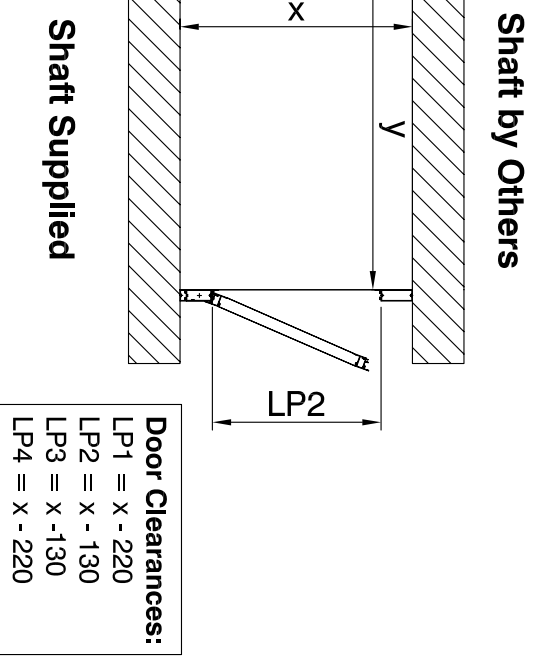


**Table 1.1**

Model	Safe Working Load	Max Travel	Pit Depth Required	Platform Sizes	
				Length	Width
A20 - 80	350Kg	800mm	220mm	1260 1400	800 950 850 1000 900 1050 1100
A20 - 160	300Kg	1600mm	325mm	1260 1400	850 1000 900 1050 1100
A20 - 200	400Kg	2000mm	360mm	1700 2200	800 900

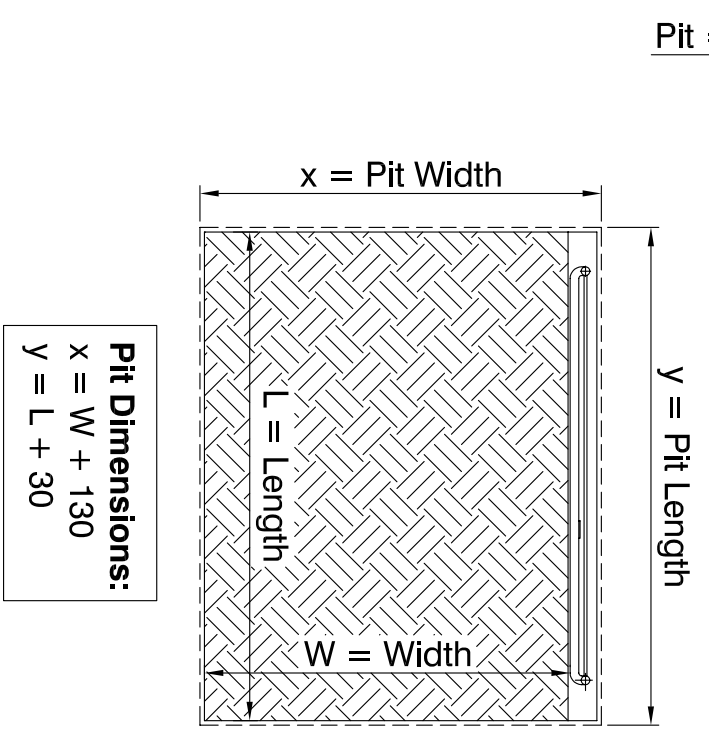

**Door Clearances:**  
 LP1 = X - 220  
 LP2 = X - 130  
 LP3 = X - 130  
 LP4 = X - 220

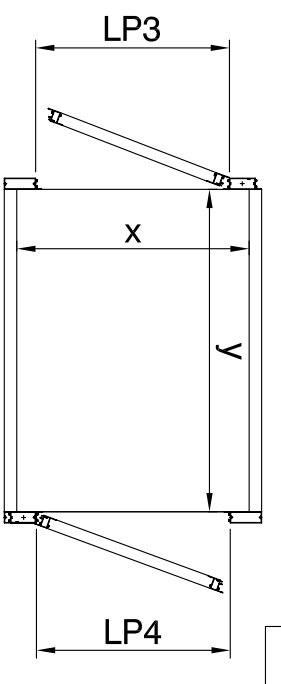

**Platform Specification**  
 Load: Various (see Table 1.1)  
 Drive: Electrical Hydraulic  
 Hosing: 3m std (up to 6m on request)  
 Speed: 0.06m/s  
 Power: Dedicated 240v 1ph 50Hz 8A  
 Motor: 0.6kw  
 Stops: 2  
 Finish: Non-slip Aluminium  
 Colour: RAL 9018 std, others on request  
 Pit: Various (see Table 1.1)

**Door/Gate Section**  
 Gate Handing: Left hand or right hand  
 Finish: Aluminium (Glazed)  
 Colour: RAL 9005 (Black) std  
 others on request

**Controls**  
 Constant pressure  
 Upper = Mounted on door/gate post  
 Lower = Mounted on door/gate post

		TITLE	D-TYPE SCISSOR LIFT		
		DWG NO.	300 - D-TYPE		
SCALE	NTS	DATE	20/5/08	DRAWN	CR
				REV	A

Apsley Barrs, Apsley, Near Andover, Hants, SP11 6NA  
 Tel - 01256 896000  
 Fax - 01256 896900  
 E-mail - info@platformliftco.co.uk  
 website - www.platformliftco.co.uk